

RAYSAN

Flexible Barrier
POLYGUARD
PuffyGuard

3R BARRIER

WITH ITS EASY-TO-ASSEMBLE DESIGN, THIS BARRIER IS PERFECT FOR PROTECTING STRUCTURES, GOODS, AND MACHINERY FROM HIGH-LEVEL VEHICLE IMPACTS IN INDOOR AND OUTDOOR AREAS WITH CARRYING AND LOADING TRAFFIC. IDEAL FOR PARKS, RAMPS, AND OPEN EDGES, IT ALSO DEFINES AND ORGANIZES SPACES WHILE ENSURING LASTING DURABILITY. BUILT TO WITHSTAND CONTINUOUS IMPACTS, IT MINIMIZES MAINTENANCE NEEDS, SAVING BOTH TIME AND COSTS.



STRONG AND LIGHTWEIGHT

Thanks to its unique chemical formula, our barrier surpasses steel barriers in both strength and weight. It is significantly lighter while maintaining its exceptional durability.

MODULAR

Thanks to its modular design, our barrier effortlessly adapts to the changing needs of your facility. This flexible solution is extremely easy to install, assemble, disassemble, relocate and organize.

NO CORROSION

Unlike steel barriers, our barriers are made of durable polymer materials, making them unaffected by environmental elements such as sunlight and rainwater.

NO PAINT AND MAINTENANCE NEEDED

Unlike Raysan's steel barriers that require regular painting and maintenance, our self-colored structure eliminates the need for these processes. Even if the barrier is scratched due to an impact, its surface retains its original color without any change.


ULTRAVIOLET RESISTANT

Our barriers are designed with exceptional resistance to UV radiation. Their chemical structure remains intact even after prolonged outdoor use, ensuring long-term durability.

ANTIBACTERIAL

Our barriers have an exceptional chemical formula that prevents them from having any chemical reaction with the substances they come into contact with.

EXPERIENCE **UNPARALLELED STRENGTH** WITH OUR **ADVANCED POLYMER**, CRAFTED FROM A **PREMIUM BLEND** OF **SOPHISTICATED POLYOLEFINS** AND **RUBBER ADDITIVES**. THIS **EXCLUSIVE COMPOSITION** DELIVERS **UNMATCHED DURABILITY** AND **FLEXIBILITY**. OUR **CUTTING-EDGE ENGINEERING PROCESS** REORIENTS THE **MOLECULAR STRUCTURE** DURING MANUFACTURING, ENDOWING THE BARRIER WITH A UNIQUE **BUILT-IN MEMORY**. THIS INNOVATIVE FEATURE ENSURES THAT THE BARRIER **RECOVERS COMPLETELY** AFTER IMPACTS, MAINTAINING **PEAK PERFORMANCE** AND **RELIABILITY**.

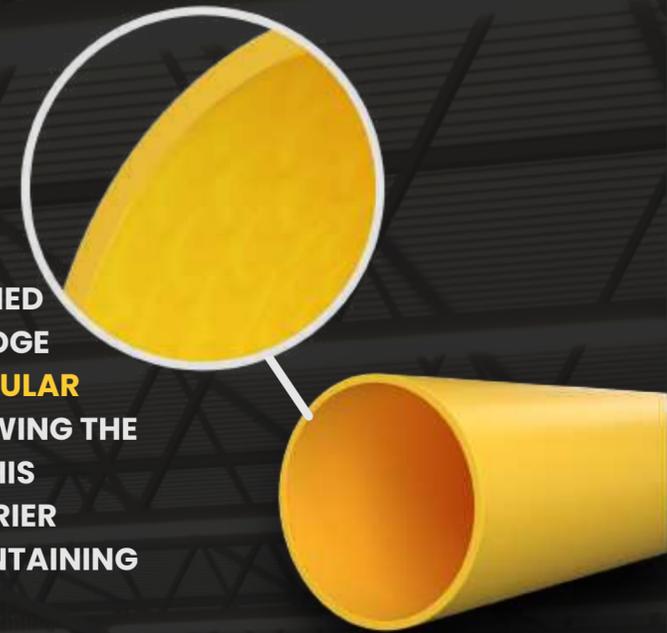


| | | | | | | |
|--------------|---------------------|-----------------|---------------------|------------------------|-------------------------|-----------------|
| DELTA | Post Dimension [D1] | Post Height [H] | Rail Dimension [D2] | Rail Length Range [L1] | Barrier Length MAX [L2] | Impact Zone [Z] |
| | Ø200 mm | 1050 mm | Ø160 mm | 400 mm - 2700 mm | 2900 mm | 780 mm |

| | | | | | | |
|-------------|---------------------|-----------------|---------------------|------------------------|-------------------------|-----------------|
| ZETA | Post Dimension [D1] | Post Height [H] | Rail Dimension [D2] | Rail Length Range [L1] | Barrier Length MAX [L2] | Impact Zone [Z] |
| | Ø160 mm | 945 mm | Ø125 mm | 320 mm - 2350 mm | 2510 mm | 675 mm |



TECHNICAL DRAWING

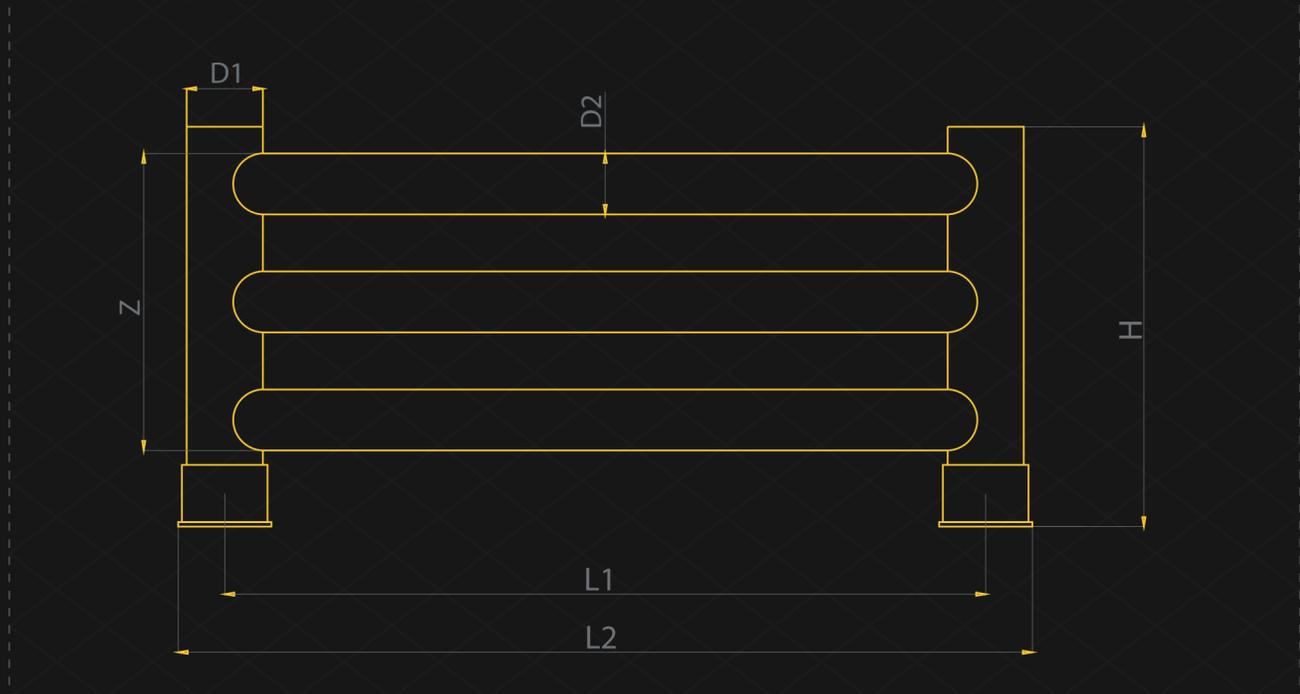

FIXING REQUIREMENTS

ELECTROSTATIC PAINT

STAINLESS STEEL


GALVANIZE

PULL OUT FORCE 16,4KN

GROUND

| | |
|-------------------------------------|--|
| Concrete Quality | Minimum C25/30 |
| Concrete Floor Plate Thickness [mm] | Minimum 150 mm |
| Water and Humidity | <p>Steel [standart] : Suitable for dry indoor use only.</p> <p>Galvanize : Can be used in most outdoor environments.</p> <p>Stainless Steel : Ideal for outdoor use or environments with frequent exposure to water and humidity.</p> |

SUITABLE APPLICATION

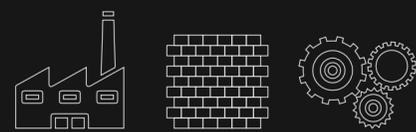

IMPACT ENERGY DETAILS

90° IMPACT

| | |
|--------------|--------------|
| DELTA | 17,300 JOULE |
| ZETA | 11,900 JOULE |

STANDART COLORS RAL 1018 PANTONE 123C RAL 9005 PANTONE B6C

*Please note that the RAL and PANTONE colours listed are the closest match to standard RAYSAN colours, but may not be exact matches of the actual product colour and should be used for guidance only.

BUILDING AND EQUIPMENT SAFEGUARDS CORRIDOR AND WALL DEFENSES MACHINERY PROTECTION SOLUTIONS


SUITABLE FOR



*90° Impact on Mid Rail of Maximum Post Centres
 *Results are Reflecting instantaneous Impact Values
 *Does not Provide Resistance to Sharp Impacts

RAYSAN

FOLLOW US



DISCOVER MORE
about our innovative products,
exceptional services &
global network of dealers.

TÜVNORD

TÜV NORD CERT GmbH

ISO 9001

tuev-nord.de

RAYSAN

AS RAYSAN, WE ARE PROUD TO PIONEER THE FUTURE OF INDUSTRIAL SAFETY. WITH OUR STATE-OF-THE-ART FLEXIBLE PROTECTIVE BARRIERS AND SOLUTIONS, WE ARE AT THE FOREFRONT OF INNOVATION, PROTECTING WORKPLACES AROUND THE WORLD. OUR COMMITMENT TO EXCELLENCE AND UNWAVERING DEDICATION TO ADVANCING SAFETY STANDARDS HAS PROPELLED US TO THE TOP OF THE INDUSTRY.

YOUR **TRUSTED** PARTNER